
HR6038(-SF) 48V

DC AXIAL FAN | TECHNICAL DATASHEET

60x60x38 mm | 48 VDC

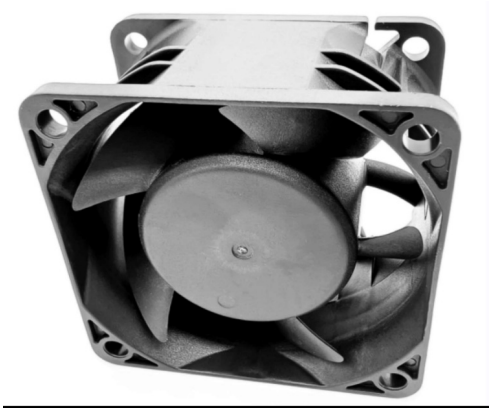

Frame Type: Black PBT (UL94V-0)
Impeller: Black PBT (UL94V-0)
Bearing: Two Ball & (Sleeve or Hydraulic Bearing)
Operation Temperature: -10°C~70°C (Ordinary humidity)
Storage Temperature: -40°C~80°C (Ordinary humidity)
Lead wire: (+) Red,(-) Black,(FG/RD)Yellow,(PWM) Blue
Safety: CE approved, RoHS
Ingress of Protection: IP42 or IP55
Unit Weight:105g
Level of error:±10%

ELECTRICAL & PERFORMANCE SPECIFICATIONS


Model	Rated VDC	Operating VDC	Current A	Power W	Speed RPM	Air flow CFM	Air flow m³/min	Pressure mmH2O	Pressure Pa	Noise dBA
HR6038HD4(-SF)	48	30~60	0.30	14.40	12000	49.84	1.41	47.47	465.52	44.40
HR6038MD4(-SF)	48	30~60	0.20	9.60	9000	37.44	1.06	27.84	273.02	35.90
HR6038LD4(-SF)	48	30~60	0.05	2.40	6000	24.53	0.69	12.23	119.94	29.00

AVAILABLE FUNCTIONS


RP	AS	CS	CL	OV	SS	FG	RD/RD/b	LD	PPWM	VPWM	TC	RC
Yes	Yes	Yes			Yes	Yes	Yes		Yes			

Function availability depends on the ordered configuration. Confirm wiring and pinout before use.

PERFORMANCE CURVES

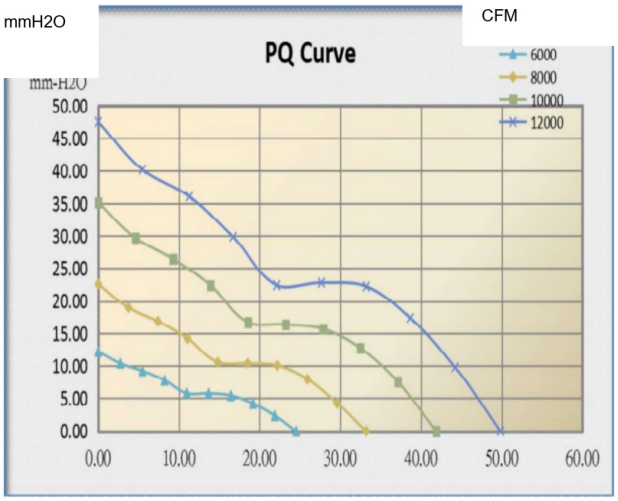

DIMENSIONS (mm)

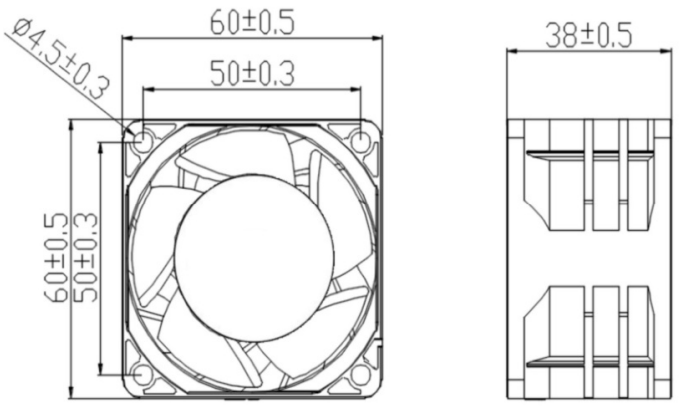

Specifications are subject to change. Contact HERAYS for configuration requirements.